

SRP-330II

3 inch Thermal POS Printer



Retail



Hospitality



Ticketing




Banking



Kiosk

Durable and Cost-Efficient

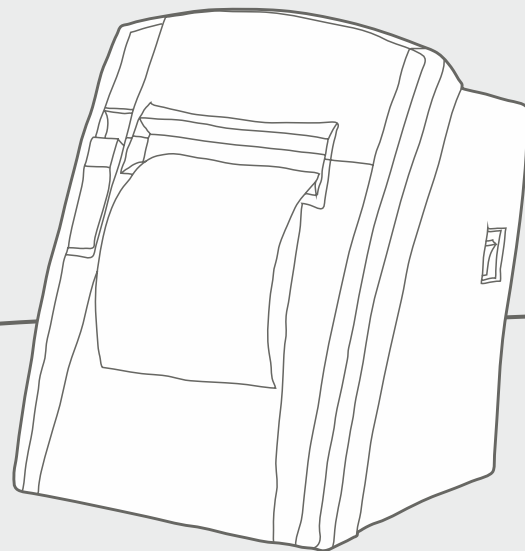

Cost-Efficiency

- All in one Plus™ Interface
 - Triple Interface
 - USB V2.0 FS + Ethernet + Serial
 - Dual Interface
 - USB V2.0 FS + Serial
 - USB V2.0 FS + Parallel
 - USB V2.0 FS + SD
- Paper saving mode, reducing the length of a receipt up to 25%

220
mm/sec

TPH
150km



Reliable Printing Performance

- Printing speed up 220 mm/sec
- High reliability mechanism : 150 km TPH & 1.5 Million cuts Auto Cutter
- 203 dpi supported



Easy Tracking™



User-Friendly Design

- Stand-alone or space-saving wall-mount use
- 2" or 3" paper choice
- 2 inch partition included
- Anti-jam guide
- Easy Tracking™ supports a QR code linking to the technical support micro site on a unique label plate found on the bottom of the printer

SRP-330II

3 inch Thermal POS Printer

Specifications

Print Characteristics

Print Method
Direct Thermal

Print Speed
220 mm/sec

Print Resolution
SRP-330II: 180 dpi
SRP-332II: 203 dpi

Print Width
Up to 72 mm

Sensor
Paper End, Cover Open

Media Characteristics

Media Type
Receipt

Media Width
80 mm, 58 mm (with 2 inch Partition)

Media Roll Diameter
Up to 80 mm

Media Thickness
0.062 ~ 0.075 mm

Supply Method
Easy Paper Loading

Physical Characteristics

Dimensions (W x L x D)
145 x 198 x 146 mm
(5.72 x 7.79 x 5.74 inch)

Weight
1.37 kg (3.02 lbs.)

Power
EnergyStar Certified,
External Power Adaptor 100-240V AV, 50/60Hz

Drawer Port
2 ports (via y-type adaptor)

Performance Characteristics

Memory
64 Mbit SDRAM, 32 Mbit FlashROM

NV Image Memory
768 Kbytes (Mono)

Receive Buffer
4 Kbytes

User Define Buffer
12 Kbytes

Interface

- Triple Interface
USB V2.0 FS + Ethernet + Serial
- Dual Interface
USB V2.0 FS + Serial
USB V2.0 FS + Parallel
USB V2.0 FS + SD

Environment Characteristics

Temperature
Operating: 0 ~ 40°C (32 ~ 104)°F
Storage: -20 ~ 60°C (-4 ~ 140)°F

Humidity
Operating: 10 ~ 80% RH
Storage: 10 ~ 90% RH

Reliability

Thermal Print Head (TPH)
150 km

Auto Cutter
1.5 Million Cuts

***** Specified Paper**

- TF50KS-E (Paper thickness: 65µm)
: Nippon Paper industries Co., Ltd.
- PD 150R (Paper thickness: 75µm)
: New Oji Paper Mfg, Co., Ltd
- PD 160R (Paper thickness: 75µm)
: New Oji Paper Mfg, Co., Ltd.
- P350 (Paper thickness: 62µm)
: Kansaki Specialty Paper, Inc. (USA)

Software

Emulation
BXL / POS

Driver / Utility
Windows Driver, OPOS Driver, JPOS Driver,
Linux CUPS Driver, Mac Driver,
Virtual COM USB/Ethernet Driver, Utility Program

SDK
iOS SDK, Android SDK

Fonts / Graphics / Symbologies

Character Size
Font A: 12 × 24 Font B: 9 × 17 Font C: 9 × 24
KOR, CHN, JPN: 24 × 24

Characters Per Line
SRP-330II: -Font A: 42 Font B, C: 56
KOR, CHN, JPN: 21

SRP-332II: -Font A: 48 Font B, C: 64
KOR, CHN, JPN: 24

Character Sets
Alphanumeric: 95
Extended Graphics: 128 × 33 page
International: 32

Graphics
Supporting user-defined fonts, graphics, formats,
and logos

Barcode Symbologies
1D: Coda Bar, Code39, Code93, Code128, EAN-8,
EAN-13, ITF, UPC-A, UPC-E

2D: Data Matrix, PDF417, QR Code

Fonts / Graphics / Symbologies

Standard
2 inch Partition

Optional
USB A-B Cable, External buzzer, B-Melodist

