

**EstiLO**  
IT6000



UNIQUE  
ALL-IN-ONE  
SYSTEM OF  
PERFECTION AND  
CREATIVITY

Inspiring design , and incomparable feeling of luxury and operation elegance, the new-EstiLo is tailor-made for the professionals in hospitality market.

**EstiLo is a Better Class of all-in-one system for tomorrow's applications.**

# A right system deserves to own, like never before.

Durability, Practicality and Beauty. New EstiLo is a dedicate balance of all three. It appears quite simple, but when you look closely, have a tremendous amount of detail in them.

Flip-top cover



## Always Fan-less !

QuadCore J1900 CPU, Lower power consumption.

## Most compact and sleek at its class !

Aluminum chassis

## Comfortable view angle !

With Adjustable hinge

## Unique and easy !

Removable flip-top cover for upgrades

Pull-bar-remove HDD device


VESA 75 for all mounting



Pull-Bar




iButton

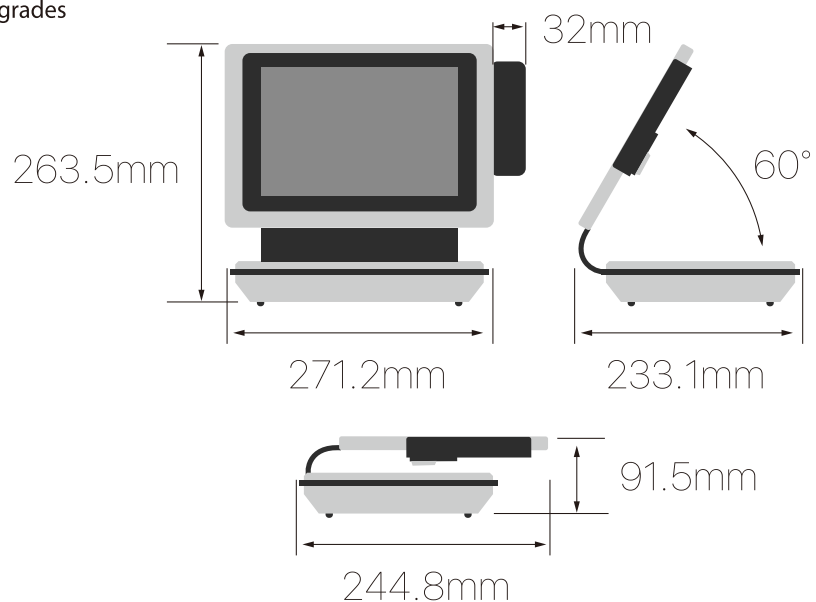

# Impossible to Capture all in one look !

Few all-in-one touch system have slim-and sleek beauty on their product mechanism, but the EstILO's state -of-the-art design concepts ,functionality and peripherals options provide the perfect applications to meet your concerns especially for hospitality market.

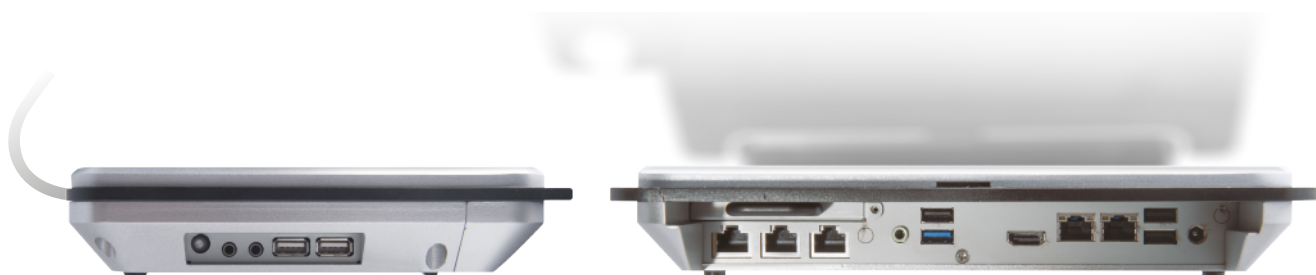

# Beyond comparison. Beyond reproach

Not just fashion for fashion's sake, but fashion to protect the environment and incorporate plenty of art.

## S P E C I F I C A T I O N S

### Main Board

|                |   |
|----------------|---|
| CPU            | Intel® Bay trail Celeron J1900 Processor D/M Series (2M Cache, 2.0 GHz) |
| Chipset        | Intel® SoC  |
| System Memory  | DDR3L 1333 MHz SO-DIMM slot, up to 8GB                                  |
| Graphic Memory | Intel® HD Graphics  |

### LCD Panel

|                    |   |
|--------------------|---|
| Panel Size         | 9.7"  |
| Maximum Resolution | 1024 x 768  |
| Brightness         | 350 cd/m <sup>2</sup>   |
| Contrast Ratio     | 500 : 1   |
| Response Time      | 20 ms   |
| View Angles (H/V)  | 140 / 120   |
| Touch Panel        | Projected Capacitive Touch (Support multi-touch function 10 points) |

### Storage

|     |                        |
|-----|------------------------|
| HDD | 2.5" SATAIII interface |
|-----|------------------------|

### Expansion

|        |  |
|--------|--|
| Socket | Full-size Mini-PCIE/mSATA slot x1<br>Half-size Mini-PCIE slot x1 |
|--------|--|

### Power

|               |   |
|---------------|---|
| Power Adaptor | Input AC 100-240V 2.5A 50/60Hz, Output DC 19V 4.73A |
|---------------|---|

### I / O

|        |   |
|--------|---|
| USB    | 5X USB 2.0 & 1XUSB 3.0  |
| Serial | 3X COM ports with RJ-45 Connector<br>COM1~3 with 0V / 5V / 12V power selectable |
| LAN    | Max 2 Realtek 8111G Gigabit Fast Ethernet controllers                           |
| Audio  | 2X Line out & 1X Microphone   |

### Control/Indicator

|                |             |
|----------------|-------------|
| Power Button   | One         |
| LED Indicators | Power (Red) |

### Optional Peripherals

|                      |   |
|----------------------|---|
| Magnetic Card Reader | ISO Track 1/2/3, USB interface            |
| I Button             | USB interface (Support Dallas Memory Key) |
| RFID                 | 125KHz , USB interface                    |
| VFD customer display | 20 x 2 characters, USB interface          |
| Second display       | 8" TFT USB interface                      |

### Dimensions

|              |  |
|--------------|--|
| IT6000J2-10S | ( 60° ) 271(W) X 233(L) X 263.5(H) mm<br>( 0° ) 271(W) X 245(L) X 91.5(H) mm |
|--------------|--|

### Environment

|                       |                                 |
|-----------------------|---------------------------------|
| Operating Temperature | 0°C ~ 40°C ( 32°F ~ 104°F )     |
| Storage Temperature   | - 20°C ~ 60°C ( - 4°F ~ 140°F ) |
| Operating Humidity    | 10% - 80% RH non condensing     |
| Storage Humidity      | 10% - 80% RH non condensing     |



All products, brands or companies mentioned are trademarks or registered trademarks of their respective companies. Specifications are subject to change without prior notice



**Pos Iberica Solutions, S.L**  
Travessera de Dalt 69  
08024 Barcelona  
Tel: 932853089 - Fax: 932953059  
Web: [www.posiberica.com](http://www.posiberica.com)  
Mail: [comercial@posiberica.com](mailto:comercial@posiberica.com)